

*IT SIMPLIFIES THE
OPERATION*

SD-50

Self-Propelled Seeder

 HALDRUP USA



IT SIMPLIFIES THE OPERATION

HALDRUP SD-50 SELF-PROPELLED SEEDER

SELF-PROPELLED MODULAR BASE MACHINE THAT CAN BE EQUIPPED WITH ANY OF THE SEEDING TECHNOLOGIES OFFERED BY HALDRUP, LIKE PRECISION TECH OR BELT CONE TECH.

THE WIDTH CAN BE SET VARIABLY AND THEREFORE BE TAILORED TO THE VARIOUS NEEDS OF THE BREEDERS. THE MACHINE IS A RELIABLE PARTNER EVEN UNDER DIFFICULT SOIL CONDITIONS.

DON'T THINK ABOUT THE TRACTOR, YOU HAVE EVERYTHING IN ONE!



LARGEST COCKPIT IN THIS INDUSTRY!





HALDRUP COCKPIT

- ☒ MULTIPLE SEATING OPTIONS:
COMFORT, REGULAR, RETRACTABLE.
- ☒ RIGHT HAND CONSOLE CONTROLS.
- ☒ MULTI-FUNCTION JOYSTICK TO
HANDLE MANY HARVEST FUNCTIONS.
- ☒ STEERING COLUMN HAS AN
ERGONOMIC DESIGN WITH AN
INTEGRATED TILT REGULATOR.



THE HEART OF THE MACHINE






HALDRUP ELECTRIC BOX

-  REINFORCED SHEET METAL CABINET.
-  WATERPROOF.
-  12 AND 24 VOLTS. / FUSES.
-  *GPS INPUT.

**Optional*

COMFORT DURING LONG WORKING HOURS

HALDRUP OPERATOR PLATFORM

- 
 DIFFERENT WIDTHS: 6.5 / 8.2 / 9.84 FT. (2.00 / 2.5 / 3 M).
- 
 SEATING OPTIONS: COMFORT, STANDARD.
- 
 *PROTECTION AGAINST WIND & RAIN.
- 
 *WASTE BAG / SEED BOX HOLDER.
- 
 *SEAT WITH INTEGRATED HEATING.

**Optional*



MANY OPTIONS AVAILABLE

HALDRUP SB-25 / SR-30 / SP-35



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR



- ANTI-STATIC MATERIAL.

- FILLING FUNNEL: 0.62 / 1.02 / 1.49 / 1.96 / 2.83 IN.
(16 / 26 / 38 / 50 / 72 MM).

- *MANUAL / AUTOMATIC SLOPE EQUALIZER.






- BELT CONE: 7.48 / 11.41 IN. (190 / 290 MM).

**Optional*

**Optional*

HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR

-  DISTRIBUTION HEAD: 4 / 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 18 / 20 / 24 OUTLETS.
-  STAINLESS STEEL SEED TUBE.
-  *QUICK CLAMPING FOR DISTRIBUTOR.
-  *"Y" TO CONNECT PIPES.
-  *AIR FLOW CLEANING

**Optional*

HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP MAGAZINE TABLE

- ☒ MAGAZINE CHAMBER OPTIONS: 4 / 6 / 12.
- ☒ BELT CONE: 4 / 6 - 7.48 IN. (190 MM) -.
- ☒ OUTLET: 4 / 6 / 12.
- ☒ MAGAZINE PLATES.



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR



- ANTI-STATIC MATERIAL.
- FILLING FUNNEL: 0.62 / 1.02 / 1.96 / 2.83 IN. (16 / 26 / 50 / 72 MM).
- *MANUAL / AUTOMATIC SLOPE EQUALIZER.
- DISTRIBUTION HEAD: 4 / 5 / 6 / 7 / 8 / 10 / 12 OUTLETS.

**Optional*



 HALDRUP USA






DELIVER BEST RESULTS

HALDRUP SEED EXCHANGE



HIGH PRECISION IN THE EFFICIENT WAY

HALDRUP DISTRIBUTOR

-  FLAPS: PNEUMATIC DRIVE.
-  SEED FEEDING / EMPTYING TIME CONTROL.
-  VACUUM SUCTION CONTROL.
-  SEEDING DISCS WITH SPECIFIC DESIGN.
-  ADJUSTABLE SEED SINGULATOR.





HALDRUP



AMAZONE



LEMKEN

 HALDRUP USA

FOR ALL CONDITIONS, ALL OPTIONS



NC TECH



NG + TECH



NX TECH


HALDRUP



AMAZONE





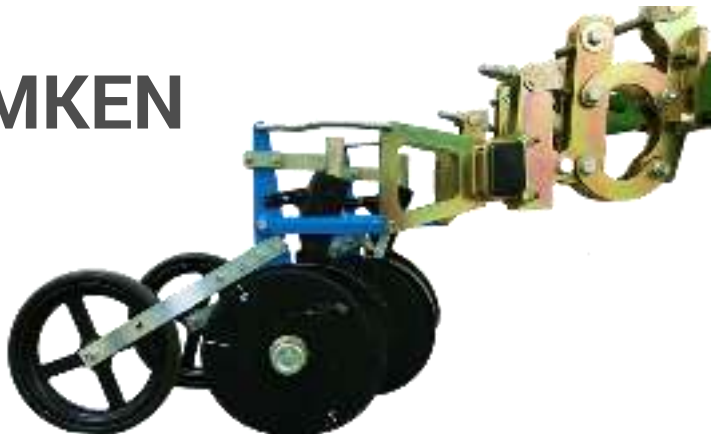


LEMKEN



BEST SEEDING PERFORMANCE

COULTERS

-  HALDRUP, LEMKEN, AMAZONE, HORSCH.
-  SPECIFIC BAR FOR EACH COULTER BRAND.
-  SINGLE OR DOUBLE DISCS.
-  SHORT AND LONG VERSIONS.
-  *ADDITIONAL SPRING, DEPTH GUIDE, COVERING TINE BAR, ETC.



HALDRUP USA






MAXIMUM WORK FLEXIBILITY

HALDRUP GEARBOX




THE DISTANCE YOU REQUIRE

HALDRUP GEARBOX

-  UP TO 6 ROWS –BASED ON SP-35.
-  PLOT LENGTH ADJUSTMENT: 2.3 TO 91 FT.
(0.7 TO 28 M). –BASED ON SB-25-.
-  STEPLESS ADJUSTMENT / CAM GEAR.
-  DISPLAY WITH ADJUSTMENT SCREW.
-  *ELECTRIC SEED DRIVE.

**Optional*

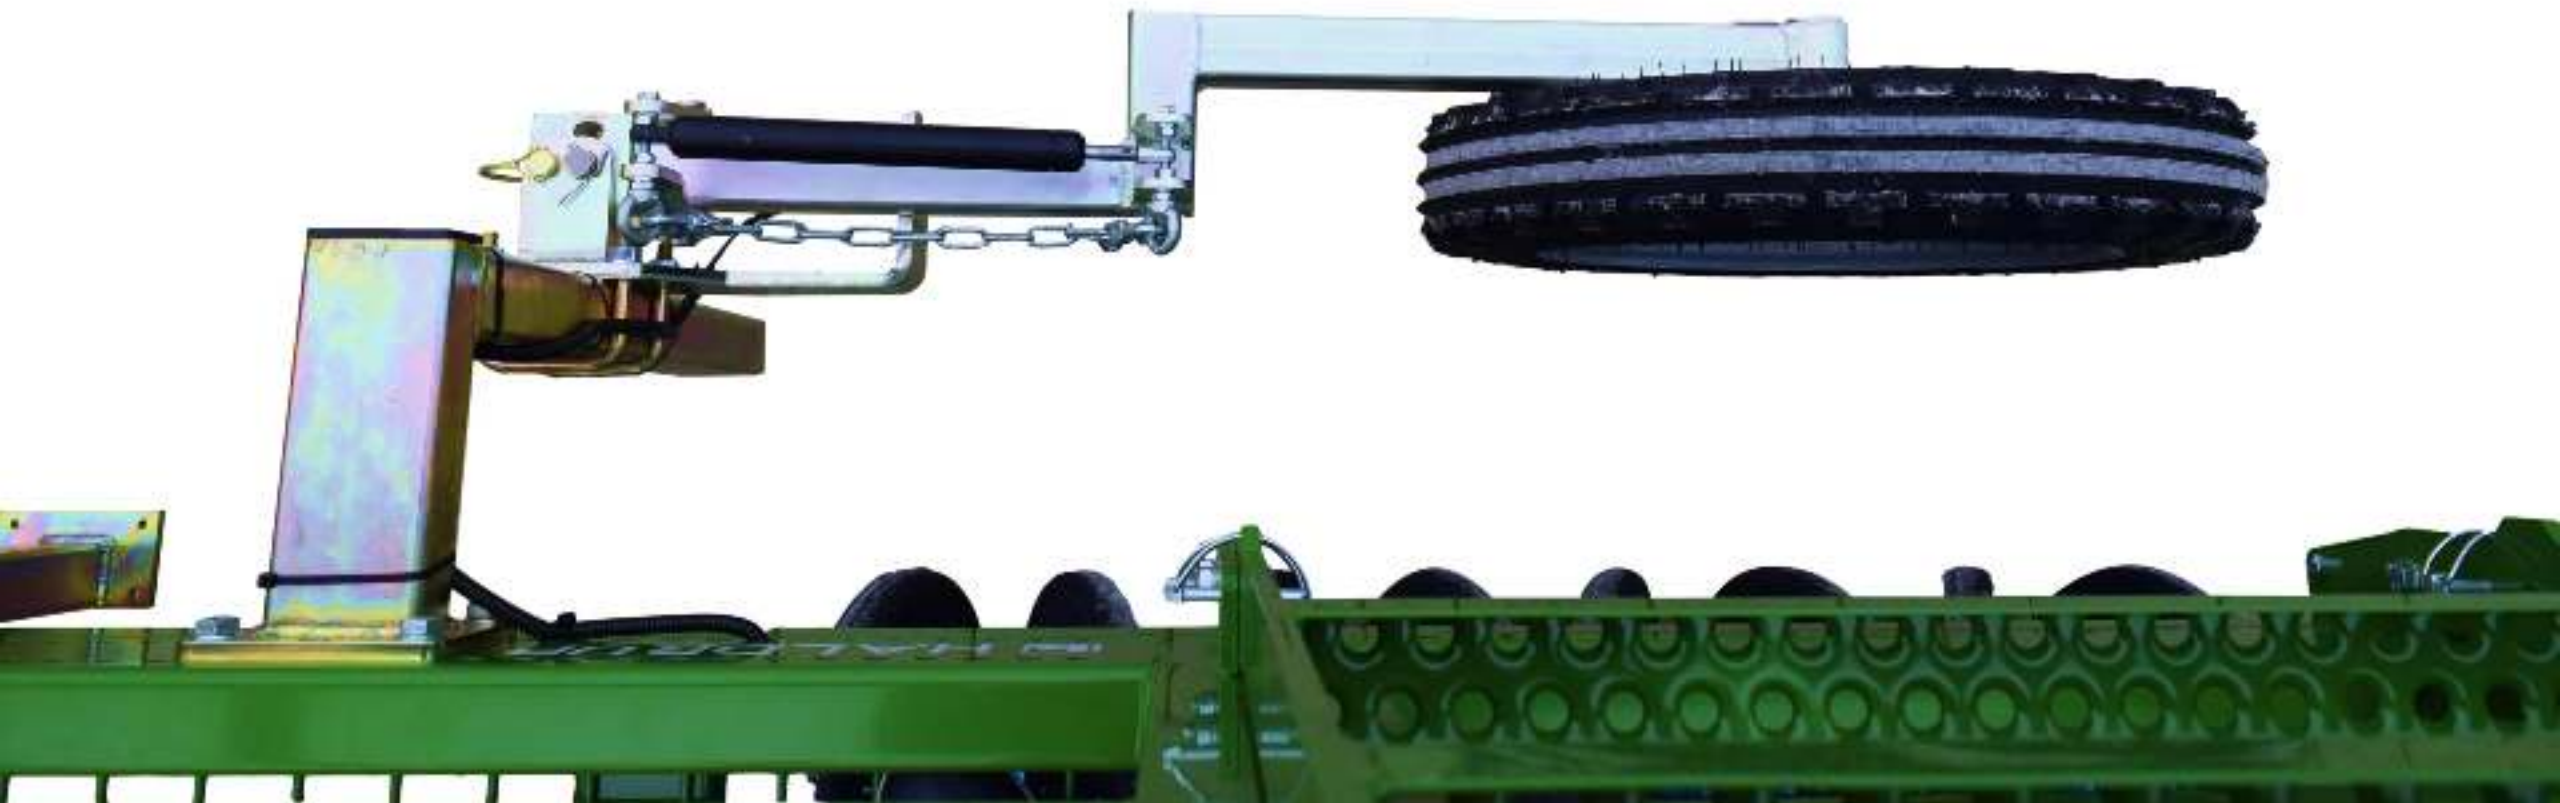

TRIGGERING THE POINT EXACTLY

HALDRUP MEASURING SYSTEM

SAME PLOT, SAME ALLEY

HALDRUP GROUD WHEEL



SENSOR INTEGRATED WITH A SEED CONTROL UNIT.



WORKING & TRANSPORT POSITION.



HIGH PRECISION.



CALIBRATION INTEGRATED.



OFFERING A MULTIPLE OPTIONS

TRIGGER OPTIONS

MANUAL TRIGGER




CABLE SYSTEM



GPS TRIMBLE CONNECTOR



GPS PULSE GENERATOR

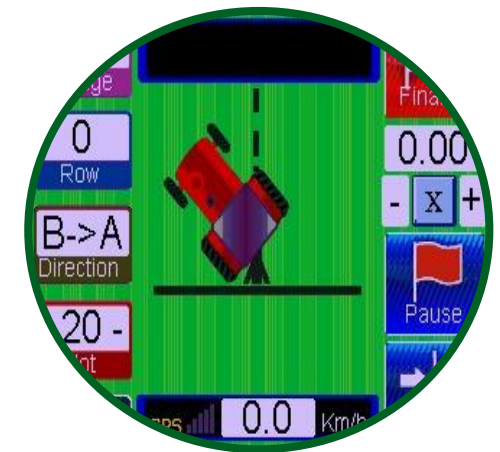

 HALDRUP USA

SUPER COMPACT

HALDRUP SD-50 DIMENSIONS

TOTAL WIDTH: Depend on track width.

TOTAL LENGTH: From 12.5 ft / 3.80 m.



TRANSPORT HEIGHT: From 6.8 ft. / 2.10 m

TRANSPORT WEIGHT: From 3300 lbs. / 1500 Kg

OPERATION REQUIRES OPTIONALS

HALDRUP OPTIONALS

FERTILIZER



ROW MARKER



SEEDER MANAGER



MICROGRANULATE



ROOF



 HALDRUP USA



HALDRUP USA CORP.

425 INDUSTRIAL PARKWAY
OSSIAN, IN 46777
USA

+1 (844) 694 – 6205

Info.usa@haldrup.net

www.haldrup.net